

# Polished Wired Safety Glass

CLEAR PATTERNED GLASS

AGC

IMAGIN WIRED

## Description

Wired glass features wire mesh embedded in the glass during the production process. It is manufactured primarily as a fire-retardant to prevent the glass from shattering and breaking under stress or when exposed to high temperatures. The glass keeps the fire at bay, protecting people from the harmful effects of smoke and flames. The industrial look dovetails perfectly with current trends in loft interiors and minimalist design.



## Applications

- furniture
- doors
- fire-resistant barriers
- partitions
- windows
- etc.

## Pattern availability


Standard	
Thickness (mm)	Dimensions* (length x width in mm)
7	3302 x 2134

\* maximum dimensions 3820x 2540mm

## Pattern description

Direction of pattern	Dimensions of wire mesh element	Relief	Longitudinal pattern deviation	Crosswise pattern deviation	Crosswise deviation of wire mesh
No	1/2" x 1/2"	—	—	—	—


## Wire mesh direction

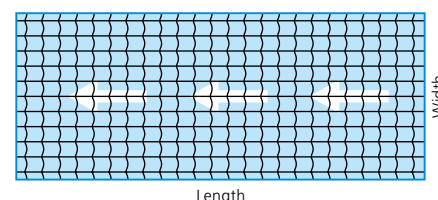

## Special information

The dimensions of each wire mesh element is 1/2" x 1/2".

## Other wired glass

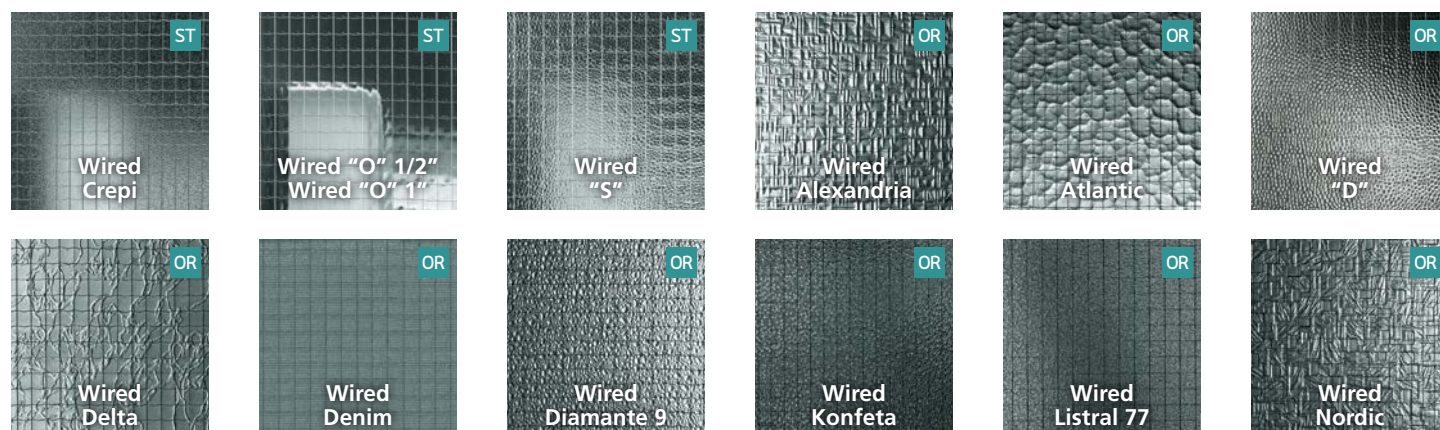

ST Standard pattern

OR Pattern on request

[↑ BACK TO CONTENTS](#)

## Processability and thickness tolerance

Thickness (mm)	Thickness tolerance	Tempering	Lamination	IGU
7	6.8–7.6	✗	✗	✓

## Physical properties

Characteristic	Symbol	Value and unit
Density	$\rho$	2500 kg/m <sup>3</sup>
Young's modulus	E	$7 \times 10^{10}$ Pa
Poisson's ratio	$\mu$	0.2
Specific heat capacity	$c_p$	$0.72 \times 10^3$ J/(kg.K)
Coefficient of linear expansion (20-300 °C)	$\alpha$	$9 \times 10^{-6}$ /K
Thermal conductivity	$\lambda$	1 W/(m.K)
Emissivity	$\varepsilon$	0.89

## Compliance with European standards

AGC Glass Europe products comply with the relevant European regulations and directives on construction products. Further information about compliance with the Construction Product Regulation (305/2011) and other relevant health and environmental legislation can be found on the AGC website: [www.agc-yourglass.com](http://www.agc-yourglass.com).

	7 mm
Resistance to fire (EN 13501-2)	E30
Reaction to fire (EN 13501-1)	A1
External fire performances	NPD
Burglar resistance (EN 356)	NPD
Pendulum body impact resistance (EN 12600)	3B3
Resistance against sudden temperature change and temperature differentials	NPD
Wind, snow, permanent and imposed load resistance	NPD
Direct airborne sound reduction (EN 12758): $R_w$ (C; $C_{tr}$ )	32 (-1,-2)
U-value (EN 673)	5.7
Light transmission / Reflection (EN 410): $\tau_v$ / $\rho_v$ / $\rho'$	88/8/8
Solar transmission / Reflection (EN 410): $\tau_e$ / $\rho_e$ / $\rho'e$	79/7/7
Solar Factor: g	NPD
Colour Rendering (EN 410): Ra	NPD
UV Transmission (EN 410)	NPD

All related documents, such as processing guides, cleaning instructions, the complete product catalogue and CE markings can be found at [www.agc-yourglass.com](http://www.agc-yourglass.com).

### AGC GLASS EUROPE, A EUROPEAN LEADER IN FLAT GLASS

Based in Louvain-la-Neuve (Belgium), AGC Glass Europe produces, processes and markets flat glass for the construction industry (external glazing and interior decoration), car manufacture and other industrial sectors (transport, solar power and high-tech). It is the European branch of AGC, a world leader in flat glass. It has over 100 sites throughout Europe, from Spain to Russia. More information on [www.agc-yourglass.com](http://www.agc-yourglass.com).

[↑ BACK TO CONTENTS](#)